


DOD800GY Cable-input perimeter detector

Honeywell

- It can be used with its built-in ILS bulb and/or with a remote contact switch connected to its cable input.
 - ◆ The standard spacing between the unit housing and the magnet supplied with it (complete with a set of shims) is 15 mm.
 - ◆ The distance between the DOD800GY and the cable contact switch must not exceed 1.5 metres.
 - ◆ Built-in protection against opening and wrenching off
 - ◆ Power supply: 1 x 3V lithium battery
 - ◆ Typical battery life > 5 years
 - ◆ Low battery detection (1 week's operating time left)
 - ◆ Dimensions: 120mm x 35mm x 26mm
 - ◆ Supervision every 9 minutes

PD6662 compliant

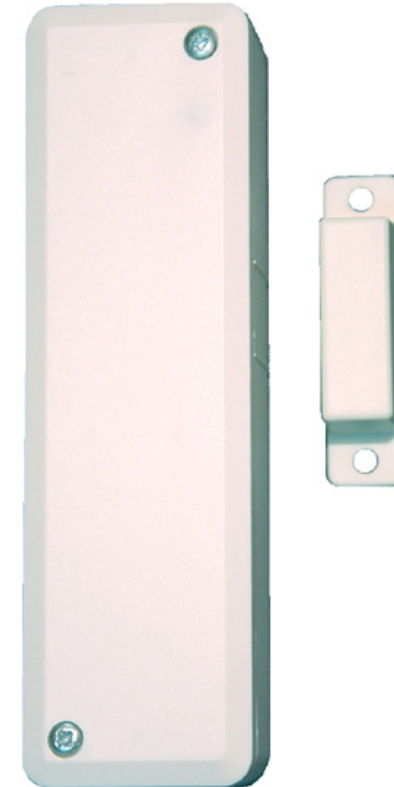

DO800M Ultra-compact perimeter detector

Honeywell

PD6662 compliant



- The standard spacing between the unit housing and the magnet supplied with it (complete with a set of shims) is 27 mm.
- Built-in protection against opening and wrenching off
- Power supply: 1 x 3V lithium battery
- Typical battery life > 5 years
- Low battery detection (1 week's operating time left)
- Dimensions: 102mm x 22mm x 23mm
- Supervision every 9 minutes