

MULTI-POINT LOCK

REPAIR LOCK KIT



FEATURES & BENEFITS


LOCK

- The repair lock is designed to replace most multi point locks in the UK market where a replacement lock is not available
- Designed for uPVC doors and frames
- Lock fits conventional 16mm wide Euro groove
- Non-handed lock mechanism with reversible sash bolt. Split spindle for lever pad applications
- Lock uses a traditional Euro key cylinder, existing cylinder can be re-used if in good condition
- Lock will fit most routed preparations, but some trimming may be needed in some applications
- Locks uses conventional adjustable rollers for enhanced performance and weather sealing
- Lock uses high tensile steel mushrooms for anti-separation with adjustable keep plates
- Mushrooms can be shimmed to suit different air gap dimensions depending on applications (patent applied for)
- Lock can be cut-to-length to suit a wide range of door heights


KEEP

- Keep strip conceals previous installation holes and does not use original hardware and fixings
- Keep strip packers are universal and are adjustable on site to suit the door frame profile (patent applied for)
- Keep strip is none handed and suitable for swing in/out designs
- Keep is adjustable for seal compression/door distortion
- Lock and keep are corrosion protected to latest international specifications
- Package is supplied with all fixings and illustrated instructions for full installation

LOCKING MECHANISM

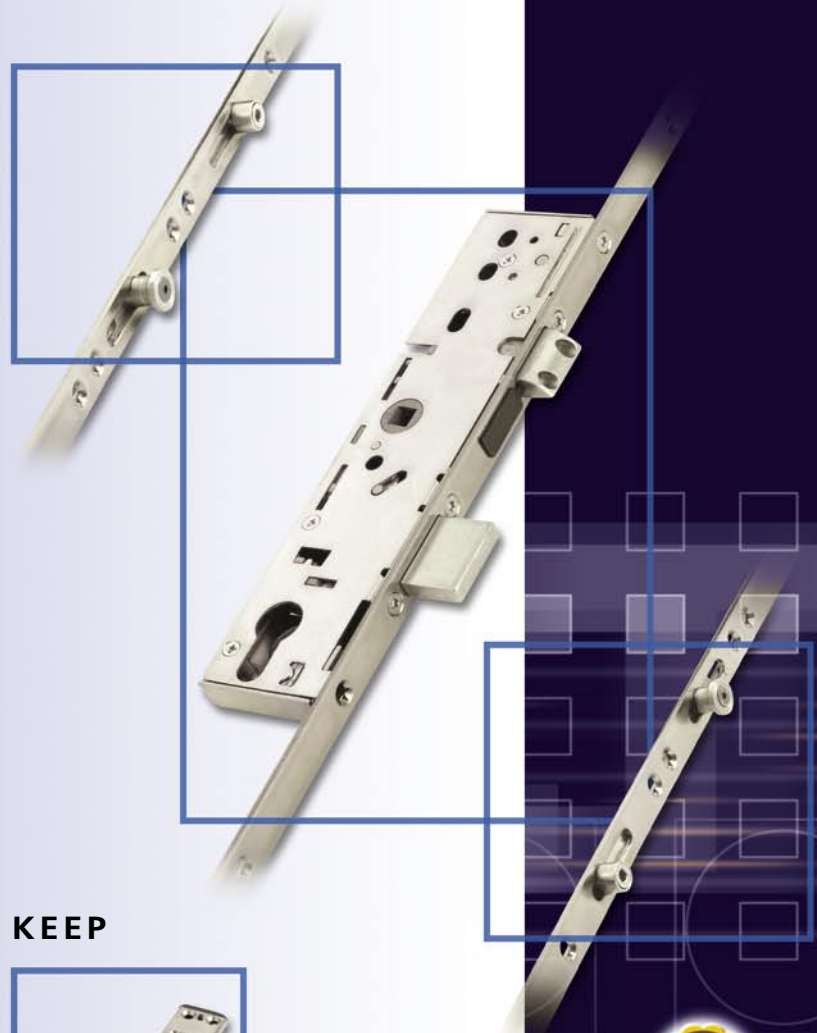

KEEP

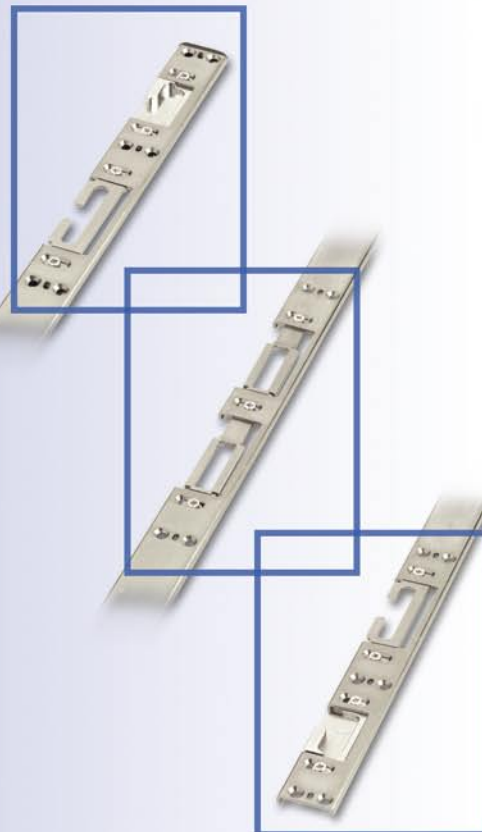

10 YEAR GUARANTEE



CORROSION RESISTANT



VARIETY OF EURO PROFILE CYLINDERS





ALTERNATIVE SPINDLE LENGTHS



The Door Lock People

MULTI-POINT LOCK

REPAIR LOCK KIT

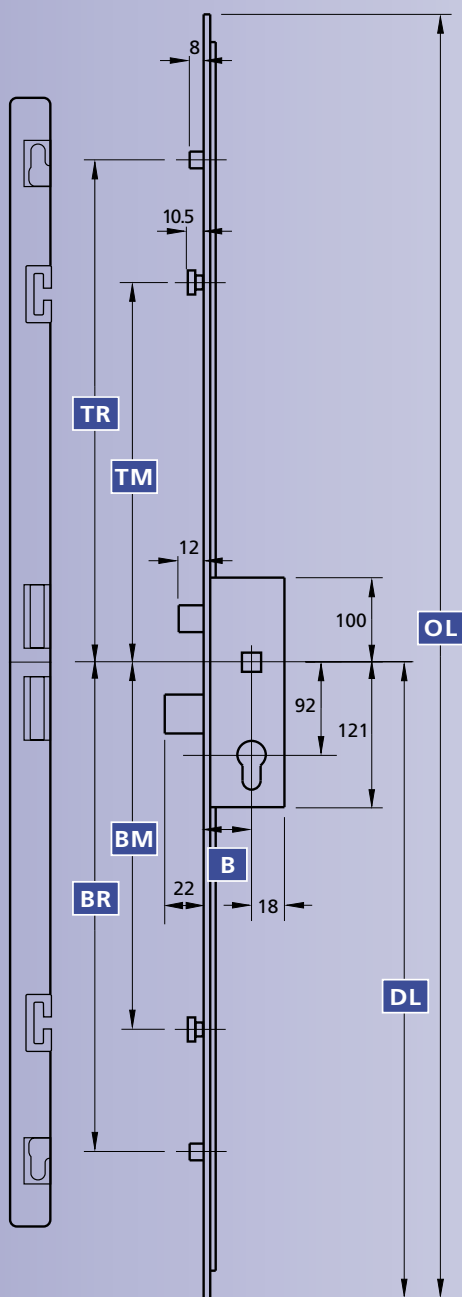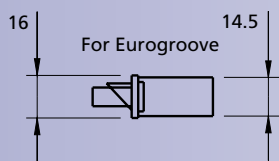

Bottom of door

KEY

- B** Backset
- DL** Datum Line
- OL** Overall Length
- TR** Top Roller
- TM** Top Mushroom
- BR** Bottom Roller
- BM** Bottom Mushroom

MAINTENANCE

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g. "3 in 1") twice per year and the surface cleaned with a soft damp cloth.
The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.

OPTION 1

B	DL	OL	TR	TM	BR	BM	Part No.	Box Qty
35	1050	2250	716	619	714	619	6135-Repair Kit	5

OPTIONAL EXTRAS

EURO CYLINDERS



DOOR HANDLES



Please refer to the ERA catalogue for more information

TECHNICAL INFORMATION

Corrosion resistance:	Plated to BS EN 1670 Grade 3 (Minimum)
Operation:	Function test 100,000 cycles

MATERIALS

Lock case:	Steel CR3 + Seal
Face bar:	Steel CR3 + Seal
Dead/sash bolt:	Forged brass satin chrome plate
Rollers/Mushrooms:	Steel CR3 + Seal
Keep:	Steel CR3 + Seal

MERCHANDISING STAND

- Stand dimensions:**
- Height: 2.3m**
- Width: 0.4m**
- Depth: 0.5m**



ERA Products Ltd, Straight Road, Short Heath,
Willenhall, West Midlands WV12 5RA
Sales Tel: (01922) 490000
Free Fax Order Line: 0800 7832465
Web site: www.era-security.com E-mail: info@era-security.com

All dimensions are in mm and are nominal.
ERA Products reserves the right to change specification without notice.

