




VISTA NCD/NCL CK COMBINATION CAMERA KITS



- IDEAL FOR APPLICATIONS SUCH AS:
- Retail environments
 - Offices
 - Warehouses
 - Hotels & reception areas

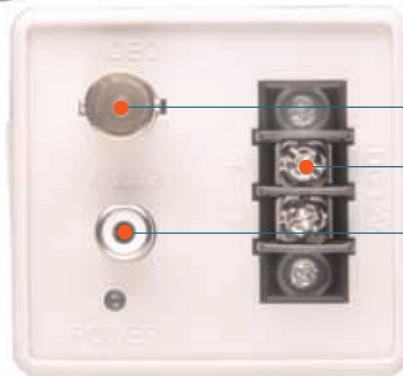

VIDEO OUT
12V DC
AUDIO OUT

CAMERA KIT WITH BUILT-IN VARIFOCAL LENS

The Vista NCD/NCL CK Range of 1/3" colour and monochrome camera kits have been designed for entry level applications, without compromising quality of image or features provided.

There are four models in the range, giving high and medium resolution, colour and monochrome options which all incorporate a 4~9mm Direct Drive (DD) varifocal lens. Selectable Automatic Gain Control (AGC), Back Light Compensation (BLC) and audio all come as standard.

The integral varifocal lens minimises installation time and gives increased flexibility in the choice of camera location.

Supplied in kit form the camera comes complete with mounting bracket, power supply and BNC connectors to ensure the installation process is made all the more simple.

Despite being extremely cost effective, no compromise has been made to quality and these cameras come with features that small to medium retail outlets, offices, reception foyers and warehouses can all benefit from by providing outstanding value for money and picture quality.

- MAIN FEATURES:
- 1/3" CCD colour/monochrome option
 - Comes with built-in 4~9mm DD lens
 - Kit comes with 12V DC PSU
 - Kit comes with internal camera bracket
 - BLC - on/off
 - AGC - on/off



THE UK'S PREMIER CCTV BRAND



TECHNICAL SPECIFICATIONS

	NCD635CK	NCD735CK	NCL635CK	NCL735CK
GENERAL:				
SENSOR	1/3" CCD			
TYPE	Monochrome		Colour	
RESOLUTION (TVL)	380	580 L	330	480
EFFECTIVE PIXELS	512 x 582	753 x 582	500 x 582	752 x 582
SENSITIVITY	0.05 lux	0.1 lux	0.4 lux	0.8 lux
VIDEO OUTPUT	1.0Vpp, 75Ω unbalanced			
SIGNAL TO NOISE RATIO	>50dB (AGC off) >52dB (AGC off)		>48dB (AGC off)	
WHITE BALANCE				Yes
AGC	On/Off switch			
BLC	On/Off switch (centre weighted)			
GAMMA	0.45			
SYNC. SYSTEM	Internal			
ATW RANGE	2700°K - 9000°K			
AUDIO	Yes			
POWER:				
SUPPLY	12V DC ± 10%			
CONSUMPTION	2.2W	2.5W	3.0W	
PHYSICAL:				
OPERATING TEMP.	-10° to +50°C, less than 80% RH			
CAMERA DIMS. (WxHxD)	56 x 52 x 111mm			
BOXED DIMS. (WxHxD)	250 x 60 x 230mm			
NET WEIGHT	0.224Kg			0.229Kg
GROSS WEIGHT	1.3Kg			
LENS FOCAL LENGTH	4~9mm with direct drive F1.6-360			
LENS FIELD OF VIEW	H= 31.6° ~ 71.0° / V= 23.6° ~ 51.8°			

ORDERING INFORMATION

NCD635CK	1/3" MONO, 380TVL, 0.05 LUX, 4~9MM DD LENS, F1.6~360, 12VDC
NCD735CK	1/3" MONO, 580TVL, 0.1 LUX, 4~9MM DD LENS, F1.6~360, 12VDC
NCL635CK	1/3" COL, 330TVL, 0.4 LUX, 4~9MM DD LENS, F1.6~360, 12VDC
NCL735CK	1/3" COL, 480TVL, 0.8 LUX, 4~9MM DD LENS, F1.6~360, 12VDC



■ SLEEK DESIGN OF THE CK CAMERA

DISTRIBUTED BY:

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE



VISTA NORBAIN HOUSE, ESKDALE ROAD, WINNERSH TRIANGLE, WOKINGHAM, BERKSHIRE. RG41 5TS
 TELEPHONE: +44 (0) 118 944 0123 FAX: +44 (0) 118 944 0999
 WEBSITE: WWW.VISTA-CCTV.COM